

Diesel Generator Set

K38 Series

808 kWe, 1010 kVA Prime



Reliable and Durable

- Cummins® 'K38 series' diesel engine with strong regrindable crankshaft, high strength connecting rod, low pressure fuel lines, STC (Step Timing Controls) injectors and high volume coolant system make 'K38 series' generating sets, more reliable and durable. Engines have clocked millions of hours, operating in some of the world's most demanding conditions. Current engines are regularly upgraded with new technologies for better performance and economy. The ultimate proof of superior performance and reliability is the fact that Cummins® entities worldwide source these engines from Cummins India for their markets.

Unmatched Warranty

- Cummins® 'K38 series' diesel engine generator sets are a truly cost effective solution to long term power need backed by industry best, 2 years / 5000 hrs warranty, for the entire generating set.
- With superior experience in technology, design capability and commitment reliability and quality we offer an unmatched 5 years or 5000 hours (including above 2 years) warranty coverage on 5 critical components (5C) of the engine – Cylinder Head, Camshaft, Crankshaft, Cylinder Block, Connecting Rod against manufacturing defect.

Cummins® Advantage

Special features of Cummins® 'K38 series' engines like STC (Step Timing Controls) injectors, low temperature aftercooler, square combustion chamber, optimised turbocharging and precision heavy duty camshaft make these engines the ultimate in exceptional fuel efficiency all across the operating range.

Single Source Power Assurance

Design, manufacture and testing of engine, alternator and other accessories is done by Cummins Group of companies for optimum performance and is backed by a countrywide product support network with a single source responsibility for the entire package.

Standard Scope

Engine: Cummins 'K38 series' direct injection, water cooled engine, 12 cylinder, 4 stroke, rated at 1500 RPM, conforming to ISO 3046 has the following specifications:

- Cummins PT fuel pump
- Cummins STC injectors
- Cummins turbocharger, Pulse tuned exhaust manifold, Stainless steel exhaust flexible connections
- Radiator or Heat exchanger, Coolant inhibitor,
- Plate type lube oil cooler
- Outboard aftercoolers
- Full flow paper element filters - fuel, lube oil and by-pass
- Dry type replaceable paper element air cleaner with restriction indicator
- Flywheel housing & flywheel to suit single / double bearing alternator
- Flexible coupling for double bearing alternator
- Starting motor – Electric, Battery charging alternator
- Electronic control panel
- Cummins PowerCommand® microprocessor based genset controller
- First fill lube oil

Alternator:

- Stamford brushless AC alternator
- Separately excited, self-regulated
- Class 'H' insulation
- Salient pole revolving field
- Single / double bearing
- Automatic voltage regulator
- PMG standard

Accessories:

- Silencer suitably optimized to reduce noise
- Sturdy base rail
- 990 ltrs. free standing fuel tank
- Suitable batteries with connecting leads and terminals

Optionals

Engine: Heavy duty air cleaner, Lube oil / Coolant heater with thermostatic switch

Alternator: Space heater, RTDs, BTDS

Control Panel: AMF control panel, Battery charger, Remote/ Auto start panel, Auto/Manual synchronizing panel, Audio/ Visual annunciation for faults

Control Panel: PowerCommand® PC 3.3

The PowerCommand® control system is an integrated microprocessor based generator set control system providing voltage regulation, engine protection, alternator protection, operator interface and isochronous governing.

AmpSentry – Includes integral AmpSentry protection, which provides a full range of alternator protection function which are matched to the alternator provided.

Power Management – Control function provides battery monitoring, testing and a smart starting control system.

Advanced Control Methodology – Three phase sensing, FET based full wave rectified voltage regulation and a PWM output for stable operation with all load types.

Communications Interface – Control comes standard with PCCNet and Modbus interface.

Regulation Compliant – Prototype tested: UL, CSA and CE compliant.

Service - InPower™ PC-based service tool available for detailed diagnostics, setup, data logging and fault simulation.

Reliable Design – For reliable operations in harsh environment.

Multi-language Support**Independent of PC/ laptop for setting up****Operator Panel Features**

Operator panel features – The operator panel, in addition to the alternator, displays the Utility/ AC Bus data.

Operator/ display functions

- 320 x 240 pixels graphic LED backlight LCD with bar graph for displaying electrical parameters
- Auto, manual, start, stop, fault reset and lamp test/panel lamp switches
- Alpha-numeric display with pushbuttons
- LED lamps indicating genset running, remote start, not in auto, common shutdown, common warning, manual run mode, auto mode and stop

Paralleling control functions

- Digital frequency synchronization and voltage matching
- Isochronous kW and kvar load sharing controls
- Droop kW and kvar control
- Sync check
- Extended paralleling (Peak Shave/Base Load)
- Digital power transfer control (AMF) provides load transfer operation in open or closed transition or soft (ramping) transfer mode

Alternator data

- Line-to-neutral and line-to-line AC volts
- 3-phase AC current
- Frequency
- kW, kvar, power factor kVA (three phase and total)

Engine data

- DC voltage
- Engine speed
- Lube oil pressure
- Coolant temperature/ low level
- Comprehensive FAE data (where applicable)

Other data

- Genset model data
- Start attempts, starts, running hours, kW hours
- Load profile (operating hours at % load in 5% increments)
- Fault history
- Data logging and fault simulation (requires InPower)

Standard Control Functions**Digital governing**

- Integrated digital electronic isochronous governor
- Temperature dynamic governing

Digital voltage regulation

- Integrated digital electronic voltage regulator
- 3-phase, 4-wire line-to-line sensing
- Configurable torque matching

AmpSentry AC protection

- AmpSentry protective relay
- Over current and short circuit shutdown
- Over current warning
- Single and three phase fault regulation
- Over and under voltage shutdown
- Over and under frequency shutdown
- Overload warning with alarm contact
- Reverse power and reverse var shutdown
- Field overload

Engine protection

- Battery voltage monitoring, protection and testing
- Over speed shutdown
- Low oil pressure warning and shutdown
- High coolant temperature warning and shutdown
- Low coolant level warning or shutdown
- Low coolant temperature warning
- Fail to start (over crank) shutdown
- Fail to crank shutdown
- Cranking lockout
- Sensor failure indication
- Low fuel level warning or shutdown

Control functions

- Time delay start and cool down
- Real time clock for fault and event time stamping
- Exerciser clock and time of day start/stop
- Data logging
- Cycle cranking
- Load shed/ dump as per configurable priority
- Configurable inputs and outputs (4)
- Remote emergency stop

Options

- Auxiliary output relays and remote annunciators

Technical Data

Generator set specification	
Model	C1010 D5 P
Prime Power Rating kVA	1010
Output Voltage and Frequency	415 Volts, 50 Hz
Power Factor	0.8 (lag)
No. of phases	3 phase
Engine specifications	
Make	Cummins
Model	KTA 38 G5
No. of cylinders	12 'Vee'
Aspiration	Turbocharged-Aftercooled
Bore and Stroke	159 mm x 159 mm
Displacement	37.8 ltrs
Output - Prime	1180 bhp (880 kWm)
Fuel consumption @ 75% load with Radiator & Fan	153.3 ltr/hr
Fuel consumption @ 100% load with Radiator & Fan	203.8 ltr/hr
Total wet weight (engine + radiator)	6000 kg
Length x Width x Height (engine)	2265 x 1400 x 1658 mm
Compression Ratio	13.9:1
Piston Speed	7.95 m/s
Governor / Class	Electronic / A1
Lubricating oil system capacity	145 ltrs
Coolant capacity (engine + radiator)	260 ltrs
Combustion air intake @ 100% load (+/- 5%)	66.9 m ³ /min
Fan air flow across radiator	1431.3 m ³ /min
Exhaust Temperature	500 °C
Alternator specifications	
Make	Stamford
Frame size / Model No.	HC6Y
Voltage Regulation	+ 0.5%
Insulation	Class H
Standard Enclosure	IP 23
Winding Pitch	2 / 3 Pitch
Stator Winding	Double layer lap
Rotor	Dynamically balanced
Wave form distortion	No load < 1.8 %, no distorting / balanced linear load < 5 %
Telephone interference Factor	Better than 50
Total Harmonic Factor	Better than 2%

Conformance standards

IS/IEC 60034-1, IS 1460, ISO 8528, ISO 3046, IS 13018, ISO 9001

Rating definitions

-Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046.


- Fuel consumption data is based on diesel having specific gravity of 0.85 and conforming to IS:1460

- Fuel consumption tolerance is +5%

Typical Open Genset Dimensions

Genset Model	Rating (kVA)	Length (mm)	Width (mm)	Height (mm)	Wet Weight** (kg)	Standard Fuel Tank Capacity - External
C1010D5P	1010kVA	4526	2140	2721	9538	990

** Approximate Weight

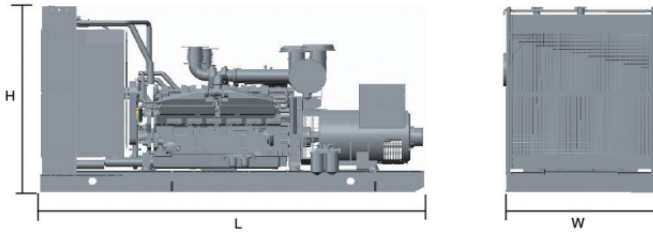



SULAYMANIYAH OFFICE

MAILK MAHMUD RING ROAD | NEAR BINA EY OIL STATION |
SULAIMANYA | KRG-IRAQ TEL: 0964 750 155 3355



ERBIL OFFICE

MAKHMOR ROAD | KURRAN | OPPOSITE KHDR SWARA
MOSQUE | ERBILKRG-IRAQ | TEL : 0964 750 150 0527

FACTORY

SOUTH INDUSTRIAL AREA | TRACTOR INDUSTRIAL| ERBIL | KRG-IRAQ
TEL: 0964 750 050 0490

MUSL OFFICE

POTATO'S STORE POINT | BEHAND INDUSTRIAL HIGH
SCHOOL |3RD STREET | MUSL | IRAQ
TEL: 0964 770 201 2305

SPARE PART SULI

SARKAREZ | NEAR ASOI DALAK INTERSECTION | SULAIMANYA | KRG-IRAQ
TEL: 0964 773 150 3655

SPARE PART ERBIL

SOUTH INDUSTRIAL AREA| MID OF 3RD STREET | ERBIL | KRG-IRAQ
TEL: 0964 750 300 3355

SERVICE WORKSHOP

OLD INDUSTRIAL AREA | OPPOSITE AUBARA QRT. | SULAIMANYA | KRG-IRAQ
TEL: 0964 750 050 0285

WWW.DIARY-SUPPLIES.COM
INFO@DIARY-SUPPLIES.COM

