

# Diesel Generator Set X2.7 Series

20-27 kVA, 16-21.6 kWe Prime



## Latest Technology And Unmatched Performance

- The Cummins® X2.7 series rugged engine and world class Stamford alternator powered diesel generator set
- Advanced in-cylinder technology to meet latest emission norms without any after-treatment device
- Best in class transient response with 100% block loading capacity
- Smart aesthetic and superior finish
- Compact in size with optimum power to weight ratio

## Environment Friendly Power

- Class defining technology engine is designed to meet stringent exhaust emission tests as per revised MoEF norms, thus offering environment friendly power.
- The Cummins® diesel generator sets are available with the lowest noise levels in its range

## Lowest Operating Cost And Comprehensive Warranty


- Highly reliable and durable product
- All elements are designed to work together to maximize efficiency even at part loads, offering the advantage of lowest operating costs.
- 500 hours / 1 year service interval
- Industry acknowledged best-in-class comprehensive warranty on the entire package including rubber components

## Single Source Power Assurance

- All the major components – the engine, alternator, control system and canopy are designed, manufactured and tested by Cummins India.
- Best and Largest customer support network in India, capable of providing round-the-clock service and spares support
- All these things put together, Cummins® offers you SINGLE SOURCE POWER ASSURANCE

## Engine

- Cummins X series, 3 cylinder, In-line 4 stroke, radiator cooled engine
- Well designed air handling system with
  - Dry type, Replaceable paper element air cleaner with restriction indicator
  - Air to air aftercooling for 25 & 27 kVA
  - Optimised turbocharger for increased altitude capabilities
- Best in class fuel economy with
  - Inline fuel pump with A1 class mechanical governing
  - Spin on fuel filter
- Standard integral set-mounted radiator system, designed and tested for 50°C ambient temperature
- Full flow spin on lube oil filter
- First fill of lube oil and coolant
- Electrical starter motor with soft start engagement feature
- Battery charging alternator
- 1X12 V DC battery

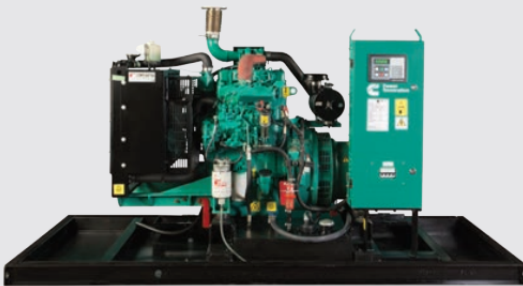

## Alternator

- Stamford PT1 alternator frames from Cummins Genereator Technology
- Brushless type, Screen protected, Revolving field, Self excited alternator conforming to IS/IEC 60034-1
- Specially designed dedicated winding
- Better motor starting capability
- Best in class efficiency
- Compact design with sealed bearings for longer life and lesser maintenance
- Impregnation on all wound components for better mechanical strength

## Control Panel

Control panel is manufactured with 14/16 gauge CRCA sheet and is powder coated for weather-proof and long lasting finish. The control panel consists of the following parts:

- PS0500 controller
- Aluminum bus bars with suitable capacity with incoming/ outgoing terminals
- Indicating lamps for 'Load ON' and 'Set Running'
- Instrument fuses duly wired and ferruled
- Circuit breakers of suitable rating with overload and short circuit protections

## PS0500 Features

Cummins PowerStart™ PS0500 control is a microprocessor based generator set monitoring and control system. This control includes an intuitive operator interface that allows for complete generator set control as well as system metering, fault annunciation, configuration and diagnostics.



- Intuitive operator interface which includes LED backlit LCD display with tactile feel soft-switches and generator set status LED lamps
- Remote Start-Stop
- Engine Metering: Oil pressure, Engine temperature, Starting battery voltage, Engine running hours
- AC Alternator Metering: L-L Voltage and L-N Voltage, Current (phase and total), kVA (phase and total) and Frequency.
- Engine Protection: Low lube oil pressure, High/Low coolant temperature, Battery Over/Under/Weak Volts, Fail to Crank/ Start, Sensor failure, Cranking lockout, Low fuel level.
- AC Alternator Protection: Over/Under Voltage, Over/Under Frequency, Loss of AC Sensing.
- Data Logging: Engine Hours, Control Hours and upto 5 recent fault codes
- Configurable glow plug control
- 12 Volt DC operation
- Sleep mode
- Modbus interface (RS485 RTU)
- InPower compatible (PC based service tool)
- Certifications - meets the requirement of relevant ISO, EN, Mil Std. and CE standards

## Silencers

- Critical grade silencer suitably optimised to meet stringent sound emission standards laid down by MoEF / CPCB

## Mounting Arrangement

- Engine and alternator are mounted on a common MS fabricated base frame with AVM pads.
- Base frame with integral fuel tank is provided with drain plug, air vent, inlet and outlet connection, level indicator and provision for cleaning

## Optional

- **Engine:** Coolant heater, Oil drain pump, Heavy duty air cleaner, Electronic Governing
- **Control Panel:** Microprocessor / relay based AMF control panel
- **Others:** Trolley mounted mobile sets

### Acoustic Enclosure

- Specially designed to meet stringent MoEF/ CPCB norms of 75 dBA @ 1mtr at 75% load under free field conditions
- The acoustic enclosure is made of CRCA sheets in munsel green shade and a structural/ sheet metal base frame painted in black.
- High quality noise absorbant and fire-retardant grade acoustic Insulation material (Foam) complying to IS 8183
- Two point lifting for easy handling at customer site
- Designed to have optimum serviceability

- Air inlet louvers specially designed to operate at rated load
- Made on special purpose CNC machines for consistency in quality and workmanship
- 11 tank pretreatment process and UV resistant powder coating of all parts to withstand extreme environment
- Use of special hardware for longer life
- Flush styling - no projections
- Fluid drains for lube oil and fuel
- Fuel filling arrangement inside the enclosure

### Technical Data

#### Generator set specification

Model	C20D5P	C25D5P	C27D5P
Duty	Prime	Prime	Prime
Power Rating kVA / kWe	20/16	25/20	27/21.6
No. of Phases	1 Phase	1 Phase	1 Phase
Output Voltage (V)	230	230	230
Power Factor	0.8 (lagging)	0.8 (lagging)	0.8 (lagging)
Current (3 phase/ 1 phase) (A)	87	109	117
Frequency (Hz) and RPM	50 Hz, 1500 RPM	50 Hz, 1500 RPM	50 Hz, 1500 RPM

#### Engine Specification

Make	Cummins	Cummins	Cummins
Model	X2.7T-G1	X2.7TAA-G2	X2.7TAA-G2
MoEF Certified Power (hp)	32	38.5	38.5
Required Power for Rated kVA (hp)	27	33	35.5
Cooling	Liquid Cooled (EG Compleat 50:50)	Liquid Cooled (EG Compleat 50:50)	Liquid Cooled (EG Compleat 50:50)
Aspiration	Turbocharged, Charge Air Cooled	Turbocharged, Charge Air Cooled	Turbocharged, Charge Air Cooled
No. of cylinders	3, In-line	3, In-line	3, In-line
Bore (mm) x Stroke (mm)	95 x 127	95 x 127	95 x 127
Compression ratio	18.3:1	18.3:1	18.3:1
Displacement (litre)	2.7	2.7	2.7
Fuel	High Speed Diesel	High Speed Diesel	High Speed Diesel
Fuel consumption @75% load with radiator and fan* (litre/hr)	4.03	4.85	5.13
Fuel consumption @100% load with radiator and fan* (litre/hr)	5.18	6.54	7.08
Performance class of generator set	ISO 8528-5 G2	ISO 8528-5 G2	ISO 8528-5 G2
Starting system	12 V DC Electrical	12 V DC Electrical	12 V DC Electrical
Lube oil specification	CH4 15W40	CH4 15W40	CH4 15W40
Lube oil sump capacity, High-Low level (litre)	7.3-3.2	7.3-3.2	7.3-3.2
Total lubrication system capacity (litre)	8	8	8
Lube oil consumption @ full load** (litre/hr)	0.01	0.01	0.01
Total coolant capacity (litre)	11	11	11
Exhaust pipe size (inch)	2.5	2.5	2.5
Total wet weight (Engine+Radiator)** (kg)	318	322	322
Length x Width x Height (Engine) (mm)	701 x 600 x 889	701 x 600 x 889	701 x 600 x 889
Mean piston speed (m/s)	6.35	6.35	6.35
Combustion air intake @100% load (±5%) (cfm)	55	67	70
Exhaust Temperature (°C)	446	463	487

#### Alternator Specification

Make	Stamford (CGT)	Stamford (CGT)	Stamford (CGT)
Alternator frame	PT144G	PT144H	PT144K
Enclosure	IP23	IP23	IP23
Voltage regulation (Max.)	±1%	±1%	±1%
Class of Insulation	H Class	H Class	H Class
Winding Pitch	2/3	2/3	2/3
Stator Winding	Double layer lap	Double layer lap	Double layer lap
Rotor	Dynamically Balanced	Dynamically Balanced	Dynamically Balanced
Waveform distortion/ Total Harmonic Distortion	No load < 1.5 %, Non distorting balanced linear load < 5 %	No load < 1.5 %, Non distorting balanced linear load < 5 %	No load < 1.5 %, Non distorting balanced linear load < 5 %
Maximum Unbalanced Load across phases#	Less than or equal to 25%	Less than or equal to 25%	Less than or equal to 25%
Telephonic Harmonic factor	< 2%	< 2%	< 2%

\*Fuel consumption data is based on diesel having specific gravity of 0.85 and conforming to IS:1460. Fuel consumption tolerance is +5%.

\*\* Oil consumption data is based on oil having specific gravity of 0.89 and meeting CH4 API categories.

# With the condition that none of the phases exceeds its rated current.

### Rating Definitions

**Prime Power (PRP):**

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528.


### Conformance Standards

- IS/IEC 60034-1
- IS 1460
- ISO 9001

### Typical Enclosed Genset Dimensions

Genset Model	Rating (kVA)	Length (mm)	Width (mm)	Height (mm)	Wet Weight## (kg)	Standard Fuel tank Capacity (litre)
C20D5P	20	2400	950	1400	1090	70
C25D5P	25	2400	950	1400	1090	70
C27D5P	27	2400	950	1400	1090	70

##Approximate weight

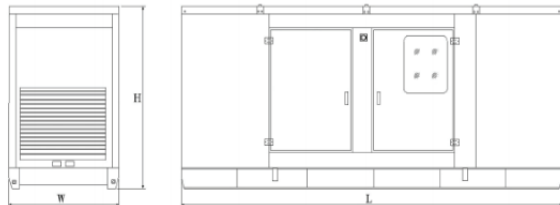

Cummins India Limited  
Power Generation Business Unit

Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and are trademarks of Cummins Power Generation. Other company product or service names may be trademarks or service marks of others. Specifications are subject to change without notice. PGBU/001/X2.7 20-27 kVA/SA/KG/February 2016



## **SULAYMANIYAH OFFICE**

MAILK MAHMUD RING ROAD | NEAR BINAHEY OIL STATION |  
SULAIMANYA | KRG-IRAQ TEL: 0964 750 155 3355



## **ERBIL OFFICE**

MAKHMOR ROAD | KURRAN | OPPOSITE KHDR SWARA  
MOSQUE | ERBILKRG-IRAQ | TEL : 0964 750 150 0527

## **FACTORY**

SOUTH INDUSTRIAL AREA | TRACTOR INDUSTRIAL| ERBIL | KRG-IRAQ  
TEL: 0964 750 050 0490

## **MUSL OFFICE**

POTATO'S STORE POINT | BEHAND INDUSTRIAL HIGH  
SCHOOL |3RD STREET | MUSL | IRAQ  
TEL: 0964 770 201 2305

## **SPARE PART SULI**

SARKAREZ | NEAR ASOI DALAK INTERSECTION | SULAIMANYA | KRG-IRAQ  
TEL: 0964 773 150 3655

## **SPARE PART ERBIL**

SOUTH INDUSTRIAL AREA| MID OF 3RD STREET | ERBIL | KRG-IRAQ  
TEL: 0964 750 300 3355

## **SERVICE WORKSHOP**

OLD INDUSTRIAL AREA | OPPSITE AUBARA QRT. | SULAIMANYA | KRG-IRAQ  
TEL: 0964 750 050 0285

[WWW.DIARY-SUPPLIES.COM](http://WWW.DIARY-SUPPLIES.COM)  
[INFO@DIARY-SUPPLIES.COM](mailto:INFO@DIARY-SUPPLIES.COM)

